


Introduction This service bulletin provides information on the proper identification of the 5 solenoids used in the U340E and U431E transmissions.

Applicable Vehicles

- 2000 – 2005 model year **Celica** vehicles equipped with 1ZZ-FE engine.
- 2000 – 2005 model year **ECHO** vehicles.
- 2004 – 2006 model year **Scion xA** and **Scion xB** vehicles.

Transmission Solenoid Identification

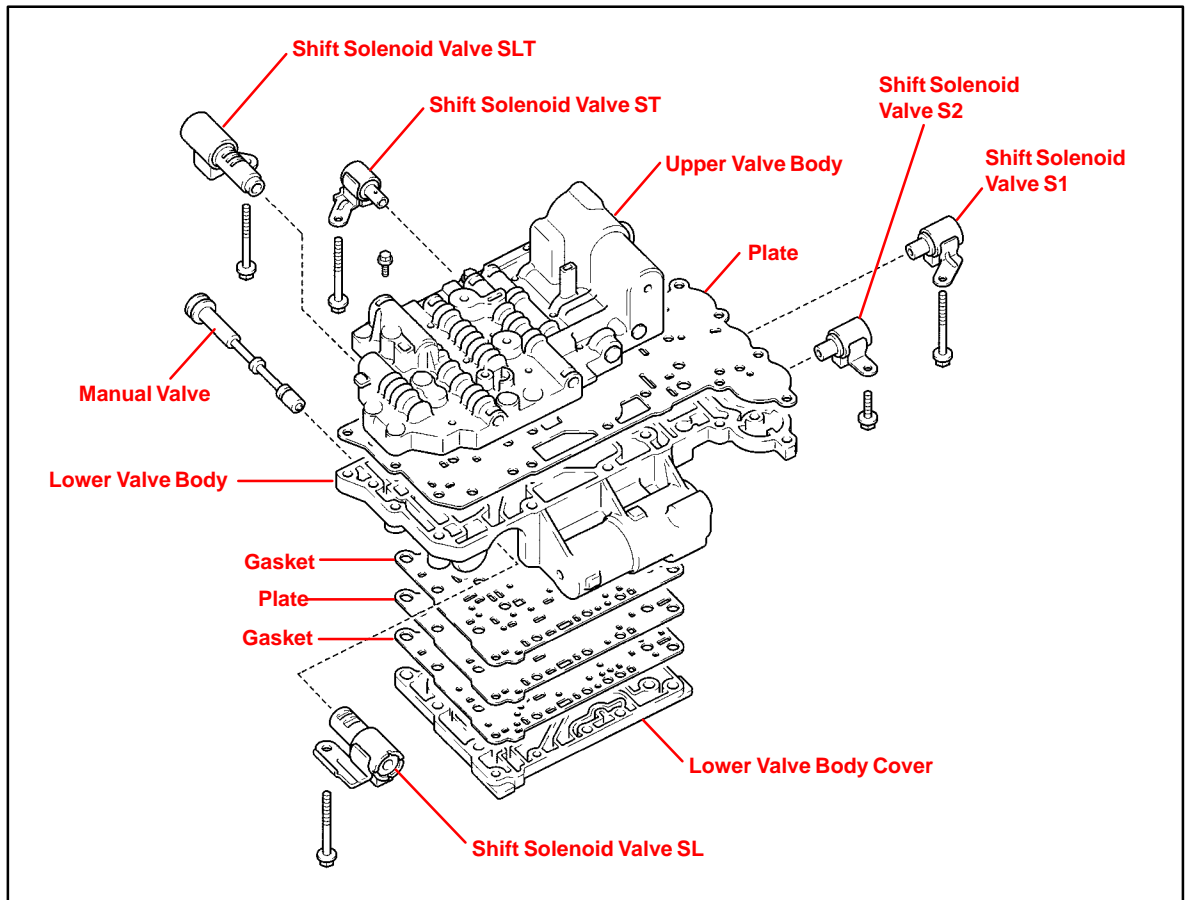

Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–

**Parts
Information**

Provided below is a chart listing the Repair Manual name of each solenoid used in the U340E and U341E transmissions as well as the part name description provided in the electronic parts catalog.

REPAIR MANUAL SOLENOID NAME	PART CATALOG DESCRIPTION
S1	Solenoid Assembly, Transmission 3–Way
S2	Solenoid Assembly, Transmission 3–Way No. 2
SL	Solenoid Assembly, Lock–up Control
ST	Solenoid Assembly, Transmission 3–Way No. 3
SLT	Solenoid Assembly, Line Pressure Control

NOTE:

Part numbers have not been included due to possible future part number changes. Refer to the parts catalog for proper current part number.