


DISPOSAL

HINT:
Use the same procedure for the RH side and LH side.

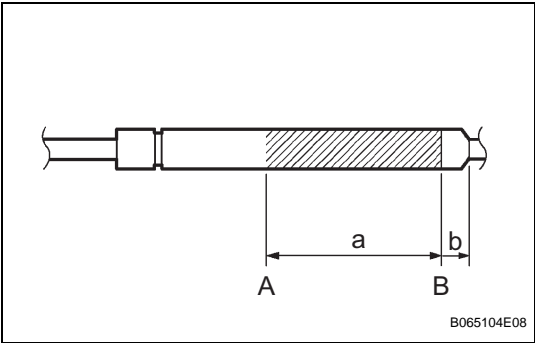

1. **DISPOSE OF BACK DOOR STAY SUB-ASSEMBLY LH**
- (a) Horizontally fix the stay in a vise with the piston-rod pulled out.
 - (b) Using a metal saw, gradually cut any area between A and B to release the gas.
- Specification**

Area	Specified Condition
a	80 mm (3.15 in.)
b	20 mm (0.80 in.)

CAUTION:
As metal debris may be blown outward by the gas, you must:

- Wear protective glasses.
- Cover the area being cut.

NOTICE:
The gas is colorless, odorless and harmless.