
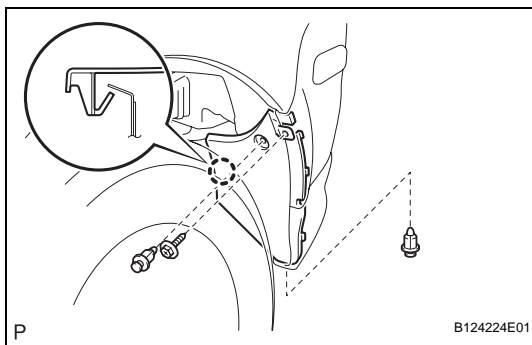


## INSTALLATION

### HINT:

A bolt without a torque specification is shown in the standard bolt chart (see page [SS-2](#)).

1. **INSTALL REAR BUMPER SIDE RETAINER LH**
  - (a) Install the 2 side retainers with the 2 screws.
2. **INSTALL REAR BUMPER SIDE RETAINER RH**
  - (a) Install the 2 side retainers with the 2 screws.
3. **INSTALL REAR BUMPER REINFORCEMENT SUB-ASSEMBLY**
  - (a) Install the reinforcement with the 6 nuts.
4. **INSTALL REAR BUMPER SHIELD BRACKET CENTER**
  - (a) Attach the 8 claws to install the 3 shield brackets.
5. **INSTALL REAR BUMPER COVER**
  - (a) Put protective tape under the quarter panel.
  - (b) Attach the clamps and connect the rear side marker light wire harness's connectors.
  - (c) Connect the wire harness's connector to the vehicle body.
  - (d) Attach the 2 claws and install the bumper cover with the 6 bolts.

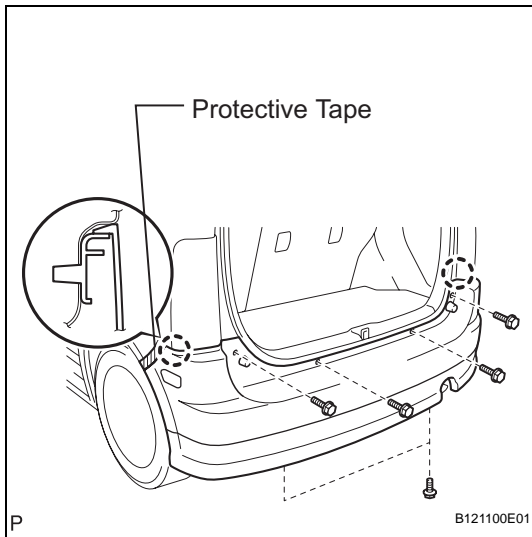

6. **INSTALL REAR BUMPER SIDE SEAL LH**
  - (a) Attach the claw and install the side seal with the screw and 2 clips.
7. **INSTALL REAR BUMPER SIDE SEAL RH**

HINT:  
Use the same procedures described for the LH side.