


# ROOF DRIP SIDE FINISH MOULDING

## COMPONENTS

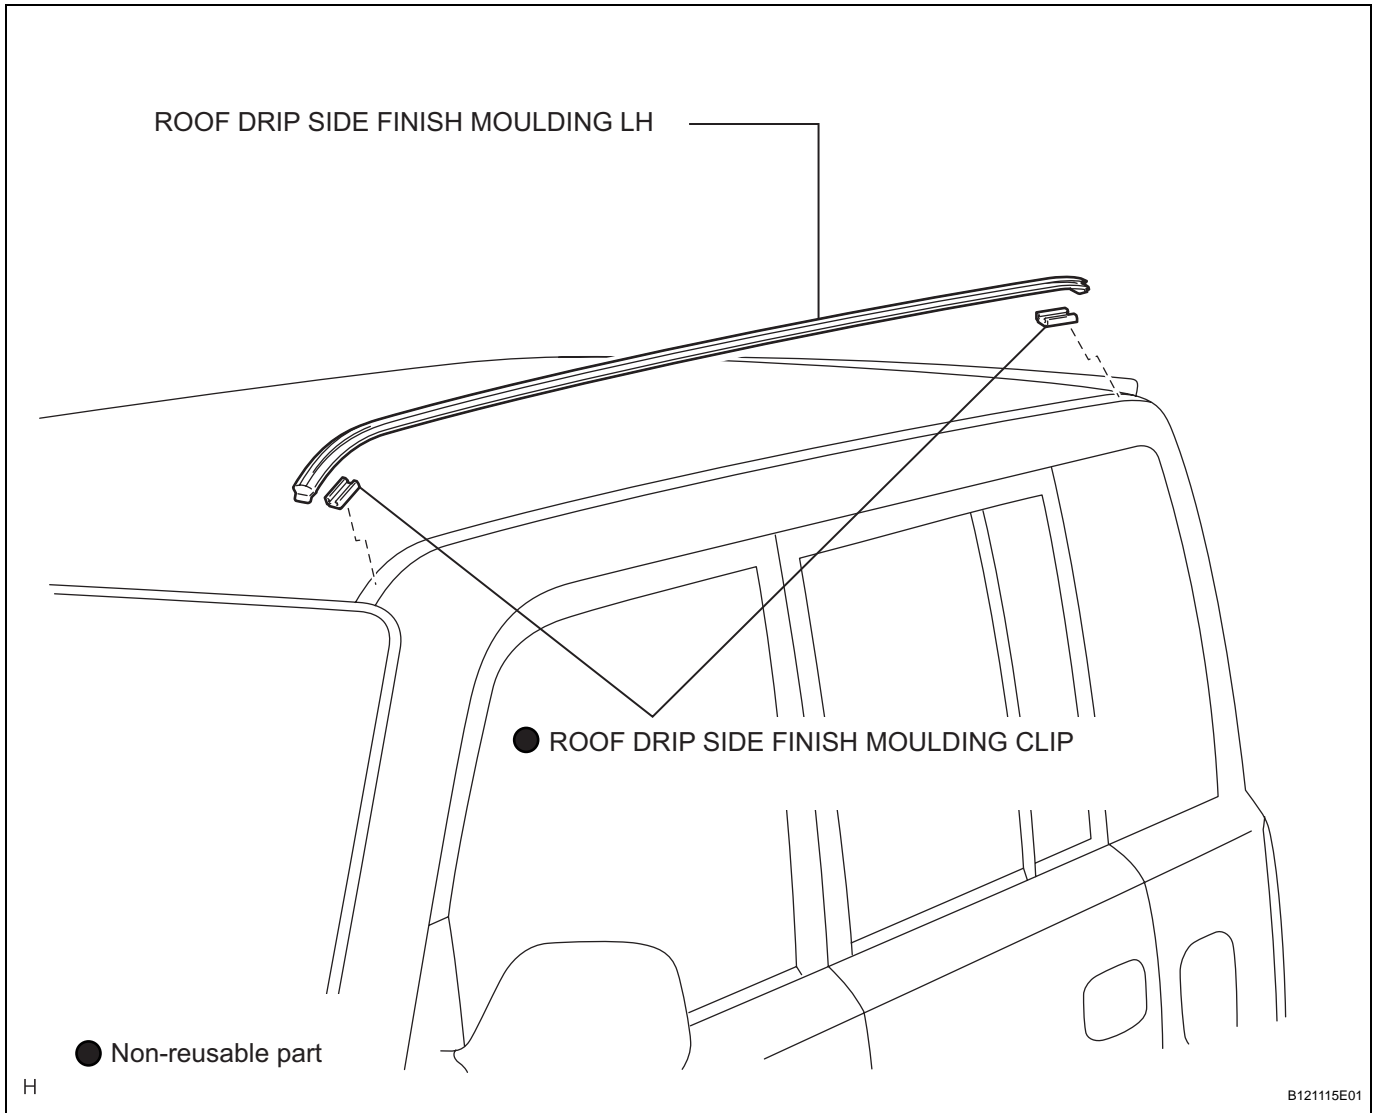

ET

## REMOVAL

### HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

### 1. REMOVE ROOF DRIP SIDE FINISH MOULDING LH

- (a) Apply protective tape around the edges of the moulding.
- (b) Using a moulding remover, detach the clips both in the front and rear ends of the moulding, and then remove the moulding.

### NOTICE:

- **Do not remove the clips.**
- **If the clips are damaged or removed accidentally, replace them.**

