

REASSEMBLY

HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

1. **INSTALL CLEARANCE LIGHT BULB**

- (a) Install the bulb to the socket.
- (b) Install the clearance light socket.

2. **INSTALL NO. 1 HEADLIGHT BULB**

- (a) Release the lock of the set spring and install the headlight No. 1 bulb.


3. **INSTALL HEADLIGHT SOCKET COVER**

- (a) Install the headlight socket cover.

INSTALLATION

HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

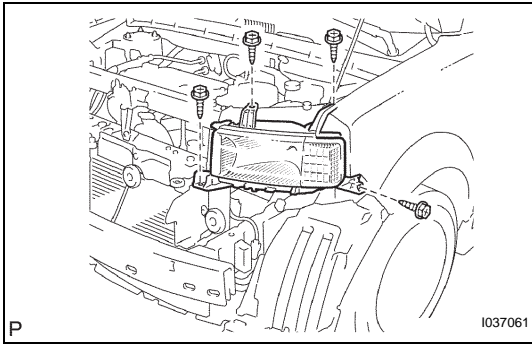

1. **INSTALL HEADLIGHT ASSEMBLY LH**
 - (a) Install the headlight with the 4 screws.
 - (b) Connect the connectors.
2. **INSTALL FRONT BUMPER COVER** (See page [ET-4](#))
3. **INSTALL FRONT FENDER LINER LH** (See page [ET-4](#))
4. **INSTALL FRONT FENDER LINER RH** (See page [ET-4](#))
5. **INSTALL RADIATOR GRILLE** (See page [ET-4](#))
6. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**
7. **INSPECT HEADLIGHT AIMING** (See page [LI-13](#))
8. **ADJUST HEADLIGHT AIMING** (See page [LI-14](#))