

# HIGH MOUNTED STOP LIGHT ASSEMBLY

## REMOVAL


1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

**CAUTION:**

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. REMOVE HIGH MOUNTED STOP LIGHT COVER


(a) Detach the 4 claws and remove the stop light cover.

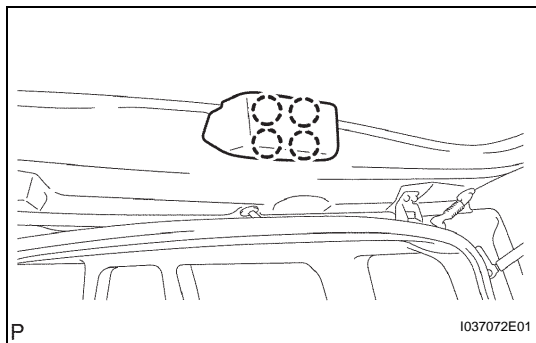


3. REMOVE HIGH MOUNTED STOP LIGHT ASSEMBLY

(a) Remove the 2 screws.

(b) Disconnect the connector and remove the stop light.

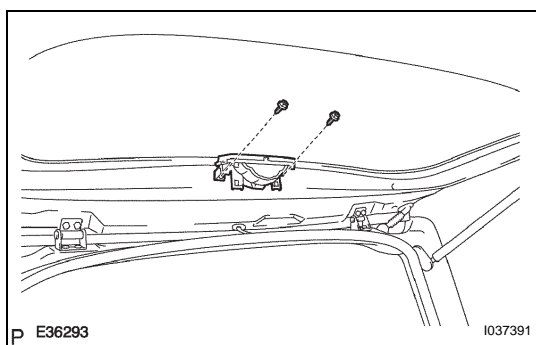



(c) Remove the stop light bulb as shown in the illustration.

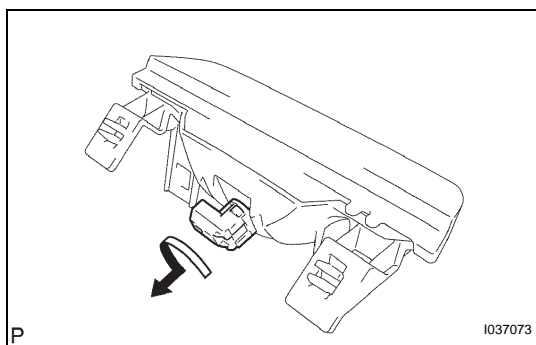

## INSTALLATION

### 1. INSTALL HIGH MOUNTED STOP LIGHT ASSEMBLY

- (a) Install the light bulb.
- (b) Connect the connector.
- (c) Install the stop light with the 2 screws.

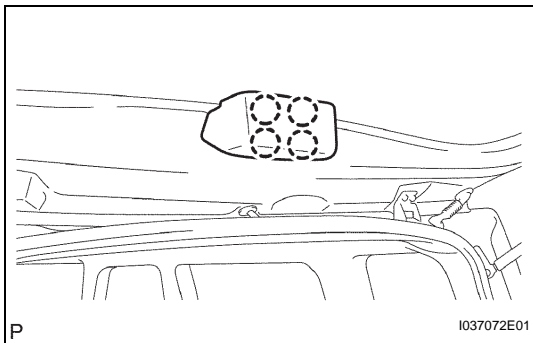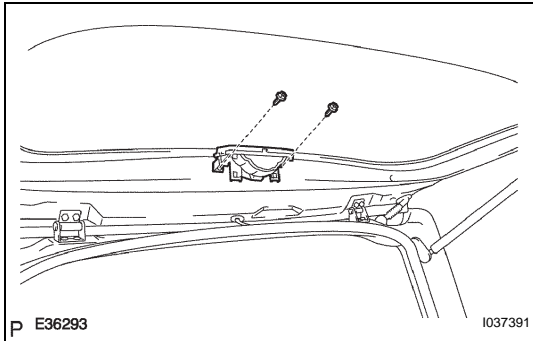

### 2. INSTALL HIGH MOUNTED STOP LIGHT COVER

- (a) Attach the 4 claws to install the stop light cover.

### 3. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL