


DTC**B1188/56****Short to B+ in Front Passenger Side Squib 2nd Step Circuit****DESCRIPTION**

The front passenger side squib (2nd step) circuit consists of the center airbag sensor assembly and the front passenger airbag assembly.

This circuit instructs the SRS to deploy when deployment conditions are met.

DTC B1188/56 is recorded when a short to B+ is detected in the front passenger side squib (2nd step) circuit.


DTC No.	DTC Detection Condition	Trouble Area
B1188/56	<ul style="list-style-type: none"> Short circuit in front passenger side squib (2nd step) wire harness (to B+) Front passenger side squib (2nd step) Center airbag sensor assembly 	<ul style="list-style-type: none"> Front passenger airbag assembly (front passenger side squib, 2nd step) Center airbag sensor assembly Instrument panel wire

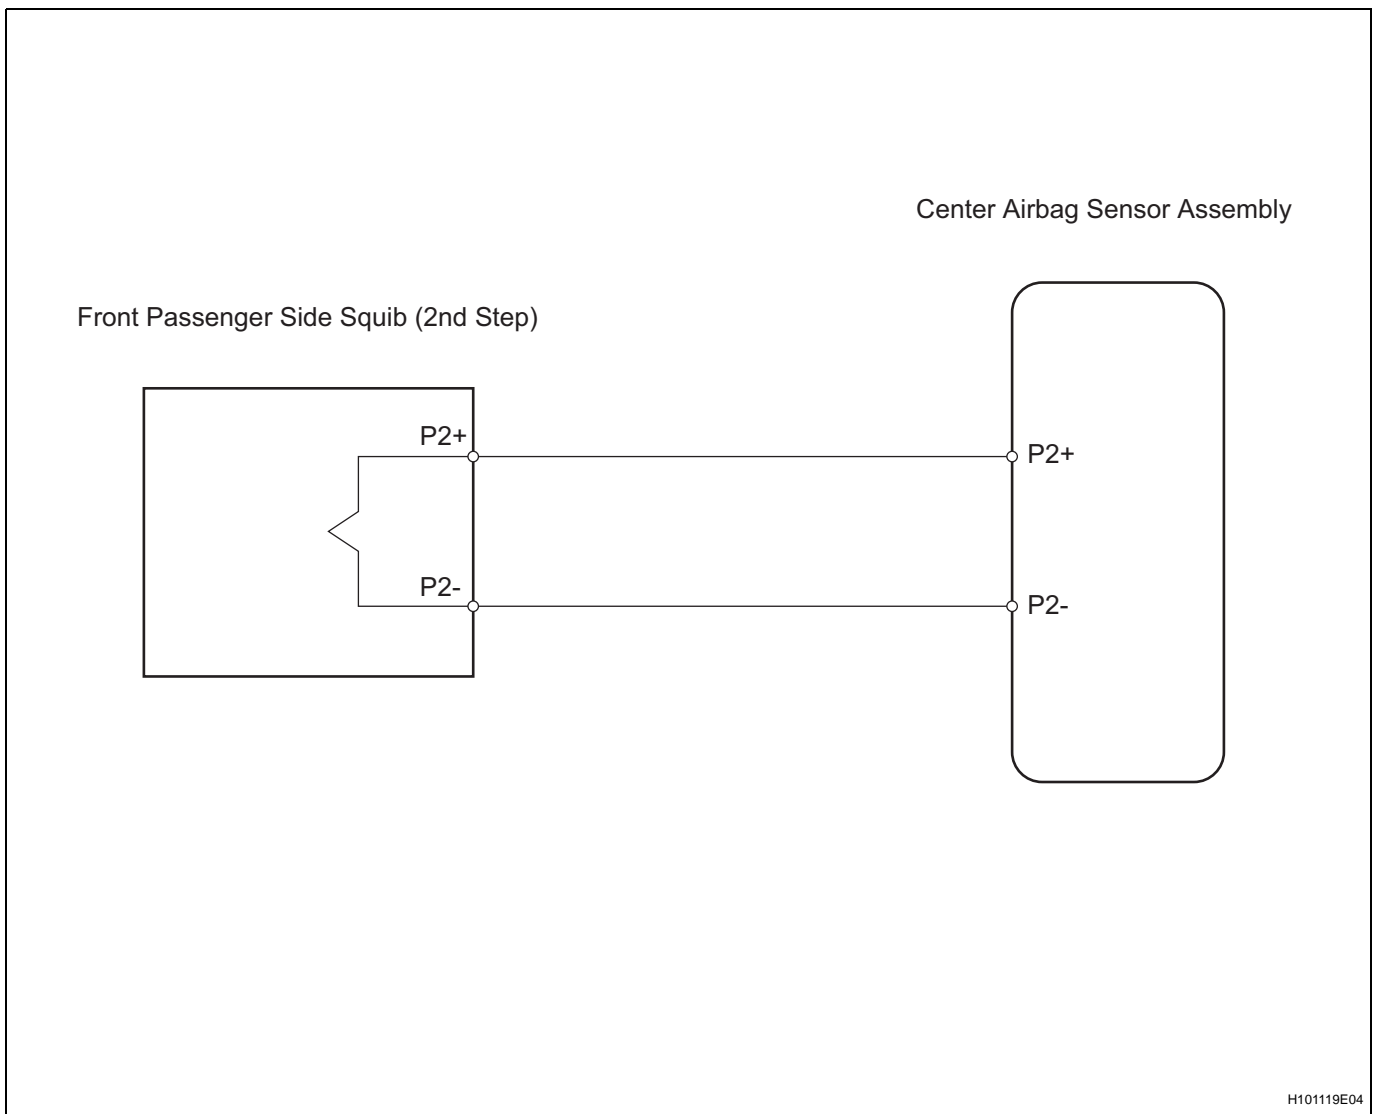WIRING DIAGRAM

1

CHECK INSTRUMENT PANEL WIRE (FRONT PASSENGER SIDE SQUIB (2ND STEP))

RS

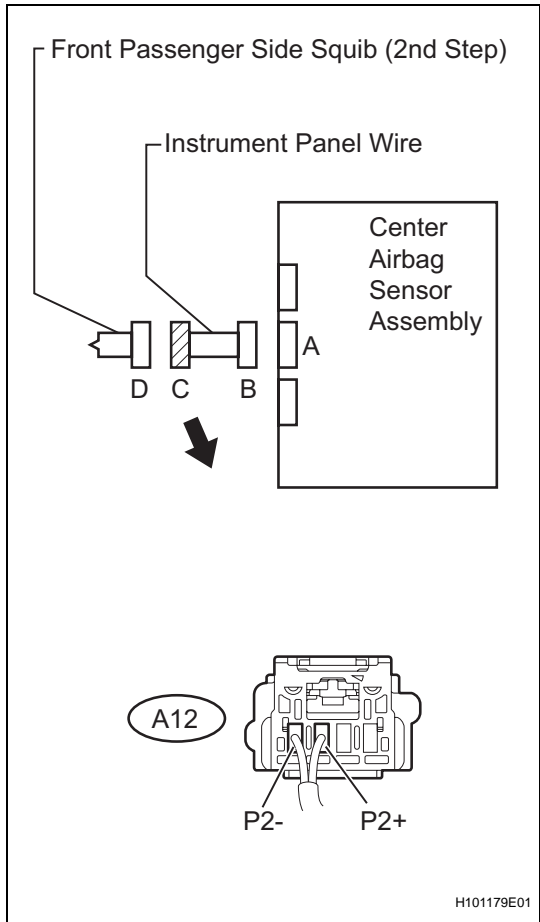

OK

- (a) Turn the ignition switch to the LOCK position.
- (b) Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- (c) Disconnect the connectors from the center airbag sensor assembly and the front passenger airbag assembly.
- (d) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- (e) Measure the voltage according to the value(s) in the table below.

Standard voltage


Tester Connection (Connector "C")	Condition	Specified Condition
A12-3 (P+) - Body ground	Ignition switch ON	Below 1 V
A12-4 (P-) - Body ground		

NG REPAIR OR REPLACE INSTRUMENT PANEL WIRE

2

CHECK CENTER AIRBAG SENSOR ASSEMBLY

- (a) Turn the ignition switch to the LOCK position.
- (b) Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- (c) Connect the connector to the center airbag sensor assembly.

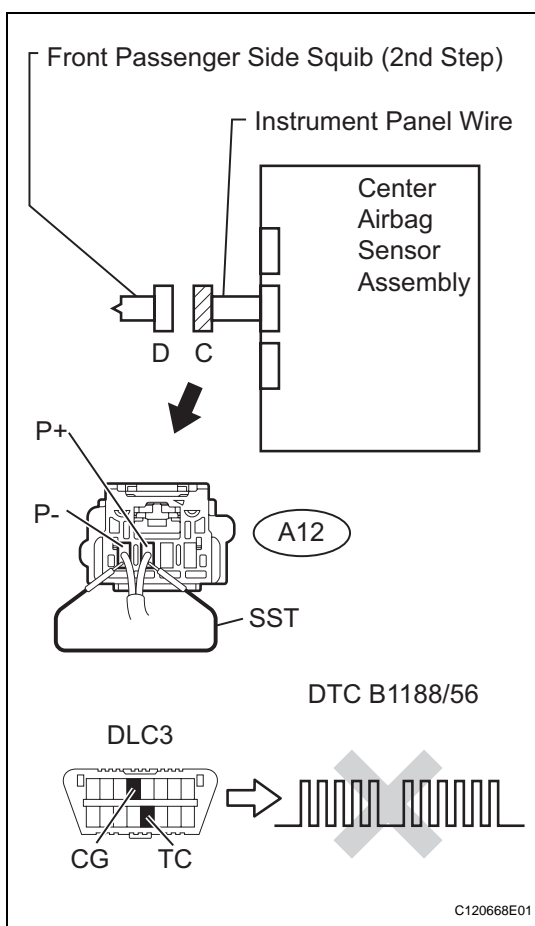

OK

- (d) Using a service wire, connect terminals D+ and D- of connector "E".

SST 09843-18040

NOTICE:

Do not forcibly insert SST into the terminals of the connector when connecting.

- (e) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- (f) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (g) Clear the stored DTCs in the memory (see page RS-21).
- (h) Turn the ignition switch to the LOCK position.
- (i) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (j) Check for the DTCs (see page RS-21).

OK:

B1188/56 is not output.

HINT:

Codes other than code B1188/55 may be output at this time, but they are not related to this check.

NG


REPLACE CENTER AIRBAG SENSOR ASSEMBLY

3

CHECK FRONT PASSENGER AIRBAG ASSEMBLY (FRONT PASSENGER SIDE SQUIB, 2ND STEP)

- (a) Turn the ignition switch to the LOCK position.
- (b) Disconnect the negative (-) terminal cable from the battery, and wait for at least 90 seconds.
- (c) Disconnect the SST from the connector "C".
- (d) Connect the connector to the front passenger airbag assembly.
- (e) Connect the negative (-) terminal cable to the battery, and wait for at least 2 seconds.
- (f) Turn the ignition switch to the ON position, and wait for at least 60 seconds.
- (g) Clear the stored DTCs in the memory (see page RS-21).
- (h) Turn the ignition switch to the LOCK position.
- (i) Turn the ignition switch to the ON position, and wait for at least 60 seconds.

RS

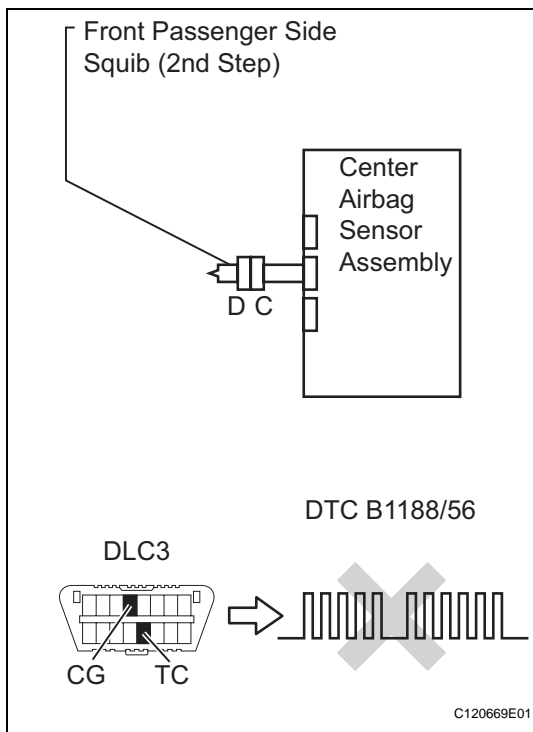(j) Check for the DTCs (see page [RS-21](#)).**OK:****B1188/56 is not output.****HINT:**

Codes other than code B1188/55 may be output at this time, but they are not related to this check.

NG**REPLACE FRONT PASSENGER AIRBAG ASSEMBLY****OK****PROBLEM SYMPTOMS SIMULATION**